



**ASME CLASS 600/900**  
**2-PC Body, Flanged Ends, Forged Body, Full Port**

KV-M63-HF (-29 °C ~ 538 °C)  
KV-M65-HF (-29 °C ~ 538 °C)

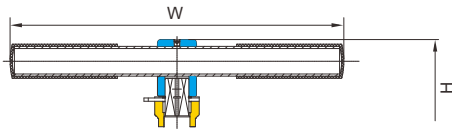


1" ~ 3"  
(Floating Type)

SeatArea A





1/2" ~ 1 1/2"


SeatArea B



2" ~ 10"

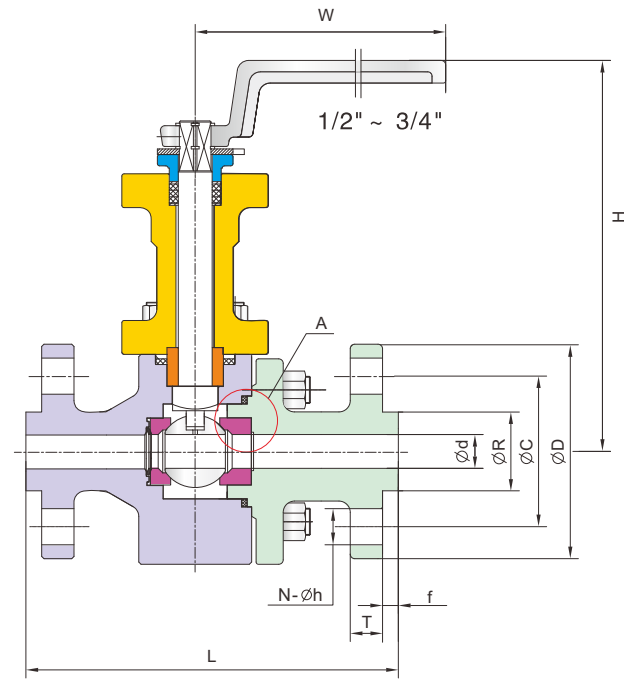

1/2" ~ 3"  
(Floating Type)

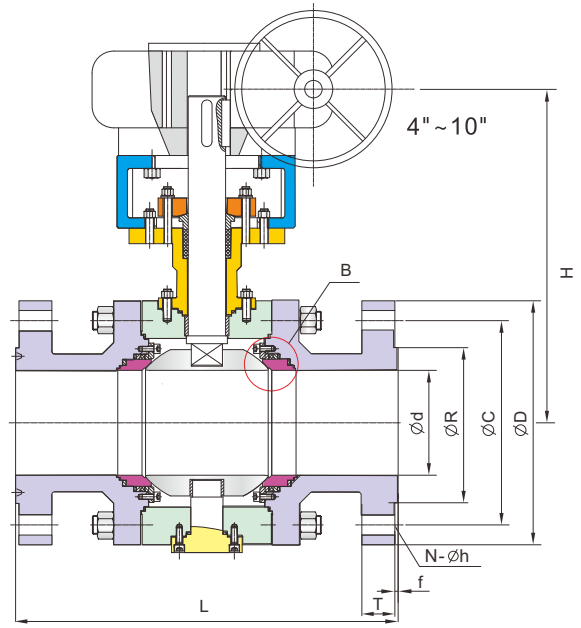

4" ~ 10"  
(Trunnion Type)

**ASME CLASS 600**

KV-M63-HF

Unit: mm

Size	Ød	L	ØR	ØC	ØD	f	T	N	Øh	H	W	P	ISO 5211 on Valve
1/2"	15	165	34.9	66.7	94.7	7	14.3	4	16.0	173.2	160	11	F05
3/4"	20	190	42.9	82.6	115.0	7	15.9	4	19.0	175.0	160	11	F05
1"	25	216	50.8	88.9	125.0	7	17.5	4	19.0	310.0	300	14	F07
1-1/2"	38	241	73.0	114.3	155.5	7	22.3	4	22.3	330.0	400	17	F10
2"	50	292	92.1	127.0	165.0	7	25.4	8	19.0	405.0	800	22	F14
2-1/2"	65	330	104.8	149.2	190.0	7	28.6	8	22.3	456.0	800	27	F14
3"	76	356	127.0	168.3	210.0	7	31.8	8	22.3	465.0	—	28	F14
4"	100	432	157.2	216.0	275.0	7	38.1	8	25.4	530.0	—	34	F14
6"	150	559	215.9	292.1	355.0	7	47.7	12	29.0	590.0	—	46	F16
8"	200	660	269.9	349.2	420.0	7	55.6	12	32.0	645.0	—	55	F25
10"	252	787	323.8	431.8	510.0	7	63.5	16	35.0	580.0	—	60	F25

**ASME CLASS 900**

KV-M65-HF

Unit: mm

Size	Ød	L	ØR	ØC	ØD	f	T	N	Øh	H	W	P	ISO 5211 on Valve
1/2"	15	216	35.0	82.6	120	7	22.3	4	23.0	173.2	160	11	F05
3/4"	20	229	43.0	88.9	130	7	25.4	4	23.0	175.0	160	11	F05
1"	25	254	50.8	101.6	150	7	28.6	4	25.5	310.0	200	14	F07
1-1/2"	38	305	73.0	123.8	180	7	31.8	4	29.0	330.0	300	17	F10
2"	49	368	92.1	165.0	216	7	38.1	8	26.0	405.0	400	27	F14
2-1/2"	65	419	104.8	190.5	245	7	41.3	8	26.0	456.0	800	27	F14
3"	75	381	127.0	190.5	240	7	38.1	8	25.4	465.0	800	30	F14
4"	100	457	157.2	235.0	290	7	44.5	8	32.5	530.0	—	34	F14
6"	150	610	216.0	317.5	380	7	55.6	12	32.5	590.0	—	46	F16
8"	200	737	270.0	393.5	470	7	63.5	12	39.0	645.0	—	55	F25
10"	252	838	324.0	469.9	545	7	69.9	16	38.1	580.0	—	60	F25