

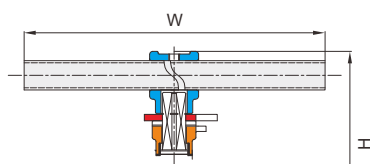


DIN PN 10/16/25/40
2-PC Body, Flanged Ends, Full Port


KV-M4J, KV-M4K, KV-M4M, KV-M4N (-29 °C ~ 200 °C)
KV-M6J, KV-M6K, KV-M6M, KV-M6N (-29 °C ~ 450 °C)

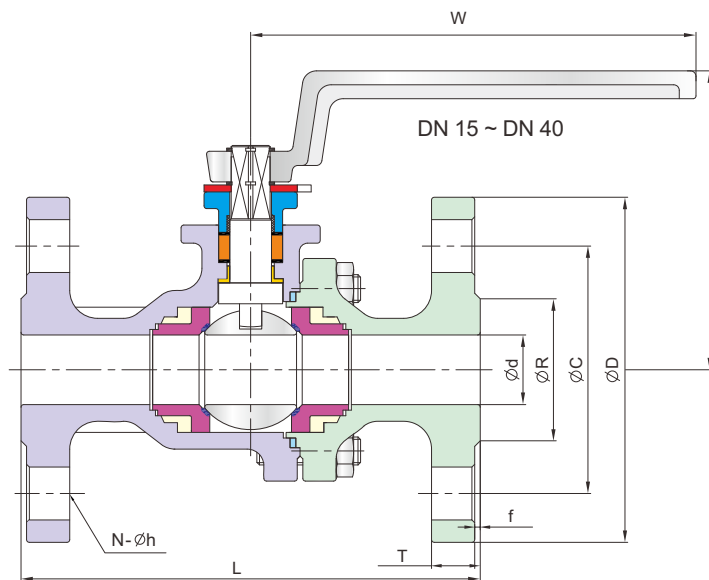

DN 50 ~ DN 80
(Floating Type)



DN 15 ~ DN 80
(Floating Type)

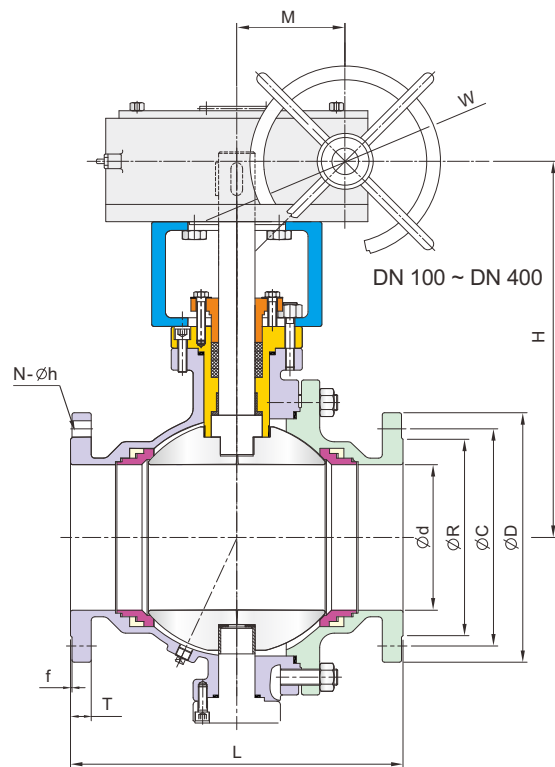

DN 100 ~ DN 400
(Trunnion Type)

DIN PN 10/16/25/40(EN 558-1 Series 1&27)

Unit: mm

Size		PN	Ød	L	ØR	ØC	ØD	f	T	N	Øh	H	W	M	P	ISO 5211 on Valve																							
DN15	1/2"	10	15.0	130	45	65	95	2	16	4	14	82	130	—	9	F04																							
DN20	3/4"		20.0	150	58	75	105	2	18	4	14	90	130	—	9	F04																							
DN25	1"	16	25.0	160	68	85	115	2	18	4	14	107	160	—	11	F05																							
DN32	1-1/4"	25	32.0	180	78	100	140	2	18	4	14	110	160	—	14	F05																							
DN40	1-1/2"	40	38.0	200	88	110	150	2	18	4	18	130	200	—	14	F07																							
DN50	2"	10/16 25/40	50.0	230	102	125	165	2	20	4	18	132	400	—	14	F07																							
DN65	2-1/2"		63.5	290	122	145	185	2	18 22	8	18	195	400	—	17	F10																							
DN80	3"	10/16 25/40	76.0	310	138	160	200	2	20 24	8	18	202	600	—	22	F10																							
DN100	4"	100.0							350								158 162	180 190	220 235	2	20 24	8	18 22	323	305	92	22	F12											
DN125	5"	10/16 25/40	125.0	400	188	210 220	250 270	2	22 26	8	18 26	351	406	105	27	F14																							
DN150	6"	150.0				480	212 218		240 250		285 300						2	22 28	8	22 26	437	406	105	27	F14														
DN200	8"	10 16 25 40	200.0	600	268	295	340	2	24	8 12	22 22	502	508	120	36	F16																							
DN250		10"							250.0		730						320	350 355	395 405	2	26 26 32 38	12	22 26 30 33	505	610	142	46	F16											
DN300					12"	300.0	850																						370	400	445	2	26 28 34 42	12 16	22 26 30 33	426	610	172	55
DN250																	10"	250.0	730																				
DN300	12"		300.0	850				378		410		460	2	26 28 34 42	12 16	22 26 30 33													426	610	172								
DN250		10"							250.0		730									345	385	450	2	26 28 34 42	12 16	22 26 30 33	426	610											
DN300					12"	300.0	850	395		430		485																				2	26 28 34 42	12 16	22 26 30 33	426	610	172	55
DN250																	10"	250.0	730	410	450	515																	

KV-M4J, KV-M6J — PN10 KV-M4M, KV-M6M — PN25
KV-M4K, KV-M6K — PN16 KV-M4N, KV-M6N — PN40

**L"for Series27
"L"for Series1